

RHM75 Series

75 Watts

- Power dense 75W in 1.5 x 4"
- Latest Medical safety approvals
- 4th ed. Medical EMC IEC60601-1-2 (2014)
- Earth leakage <250uA
- EN55011 Level B conducted & radiated
- -10 to +70°C Operation
- 5 Year warranty



Medical

Dimensions:

4.02 x 1.5 x 1.13" (102.0 x 38.1 x 28.6mm)

The RHM75 series offers 75W in a dense, 1.5 x 4" open frame package. The units are designed for use in medical applications, are very efficient and have low emissions, meeting EN55011 Level B. They have a wide temperature range from -10 to +70°C and offer low no load power consumption of <0.5W. Outputs are available from 5 to 48V and all models come with a FiDUS 5 year warranty.

Models & Ratings

INSTALLATION ADVICE PG5

Model Number	Output Power	Output voltage	Output Current	Efficiency
RHM7505	40W	5V	8A	79%
RHM7507	50W	7V	7.14A	81%
RHM7509	60W	9V	6.66A	84%
RHM7512	75W	12V	6.25A	85%
RHM7515	75W	15V	5A	86%
RHM7518	75W	18V	4.16A	86%
RHM7524	75W	24V	3.12A	87%
RHM7528	75W	28V	2.67A	87%
RHM7536	75W	36V	2.08A	88%
RHM7548	75W	48V	1.56A	89%

Notes

1. Looms kits available, see 'Installation Advice pg5

Key specifications

Parameter	Minimum	Typical	Maximum	Units	Notes & Conditions
AC Input range	80		275	VAC	Derate linearly from 100% load at 90VAC to 80% load at 80VAC
Operating temperature	-10		70	°C	Derate linearly from 100% power at 40°C to 50% power at 70°C
Efficiency	79		89	%	
Dimensions	4.02 x 1.5 x 1.13" (102.0 x 38.1 x 28.6mm)				
EMC	EN55011 Level B conducted and radiated. EN61000-3 and EN61000-4, harmonics, flicker, Surge, EFT, ESD, conducted and radiated. IEC60601-1-2 (4th Edition)				
Safety	IEC60601-1 3.1 edition, ES60601-1:2005 (R2012), CSA-C22.2 No. 60601-1:14, EN60601-1:2006/A1:2013				


RHM75 Series

Input					
Parameter	Minimum	Typical	Maximum	Units	Notes & Conditions
Input voltage	80		275	VAC	Derate linearly from 100% load at 90VAC to 80% load at 80VAC
Input frequency	47		63	Hz	
Power factor					EN61000-3-2 class A compliant
Input current (rms)			1.8	A	Low line. At 100VAC
			0.8		High line. At 240VAC
Inrush current			60	A	100VAC cold start at 25°C
			120		240VAC cold start at 25°C
No load input power			0.5	W	
Earth leakage current			0.25	mA	

Output					
Parameter	Minimum	Typical	Maximum	Units	Notes & Conditions
Output voltage	5		48	VDC	See Model & Ratings table
Set point accuracy		5		%	
Line regulation			±1	%	Full load, V_{in} =100 to 120VAC or 200 to 240VAC
Minimum load	0			%	
Transient response			4	ms	50%-100% or 100%-50% 110VAC
Ripple & Noise	5V output 50mV. 7V output 70mV. 9V output 90mV. 12V output 120mV. 15V output 150mV. 18V output 190mV. 24V output 200mV. 28-48V outputs 280mV.			mV(Vp-p)	All models measured with 0.47uF capacitor and 20 MHz bandwidth.
Hold up time		16		ms	
Overload protection	110		150	%	
Short circuit protection					Trip and restart. Automatic recovery
Overvoltage protection	110		275	%	Shutdown and latch off. AC recycle to reset.

General					
Parameter	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency	79		89	%	
Isolation: Input to Output	4000			VAC	
	1500			VAC	
	1500			VAC	
Power density			11.0	W/In ³	
MTBF	200			KHrs	As per MIL-HDBK-217F, 25°C GB
Weight		117.2		g	

Environmental					
Parameter	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating temperature	-10		70	°C	Derate linearly from 100% power at 40°C to 50% power at 70°C
Storage temperature	-40		85	°C	
Cooling					Convection cooled
Temperature coefficient			±0.04	%/°C	
Humidity	0		95	% RH	Non condensing

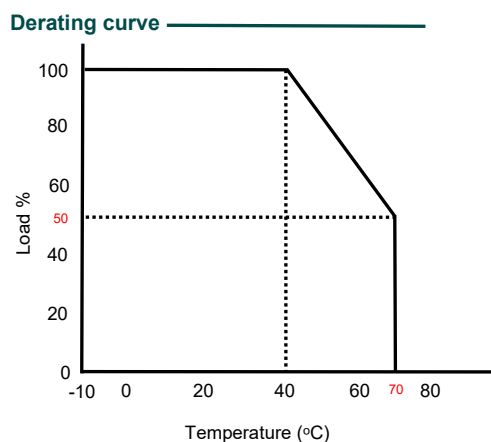

EMC: Emissions

	Standard	Test level	Criteria	Notes & Conditions
Conducted	EN55011	B		
Radiated	EN55011	B		
Harmonic current	EN61000-3-2	Class A		
Voltage flicker	EN61000-3-3			


EMC: Immunity

	Standard	Test level	Criteria	Notes & Conditions
ESD	EN61000-4-2	4	A	±15kV air, ±8kV contact,
Radiated	EN61000-4-3	2	A	3V/m 80% AM (1KHz) 80-2700MHz
EFT	EN61000-4-4	3	A	±2KV (100V and 240V 50Hz)
Surges	EN61000-4-5	Installation Class 3	A	±2KV (100V and 240V 50Hz)
Conducted	EN61000-4-6	3/6Vrms	A	80% AM (1KHz)
Magnetic Fields	EN61000-4-8	30A/m	A	50/60Hz 1 min
Voltage Dips	EN61000-4-11	100% for 0.5 cycles, 60% 5 cycles, 30% for 25/30 cycles, interrupt 250/300 cycles and 1 sec - performance criteria A,A,A,A.		

Safety Approvals

	Safety standard	Notes & Conditions
UL	ES60601-1:2005 (R2012), CSA-C22.2 No 60601-1:14	
CB	IEC60601-1 3.1 edition	
TUV	EN60601-1:2006/A1:2013	
CE		2011/65/EU RoHS Directive and 2014/35/EU Low voltage directive
Means of patient protection	Input to Output: 2 x MOPP Input to Ground: 1 x MOPP Output to Ground: 1 x MOPP	
Equipment protection class		Class I

Mechanical Details

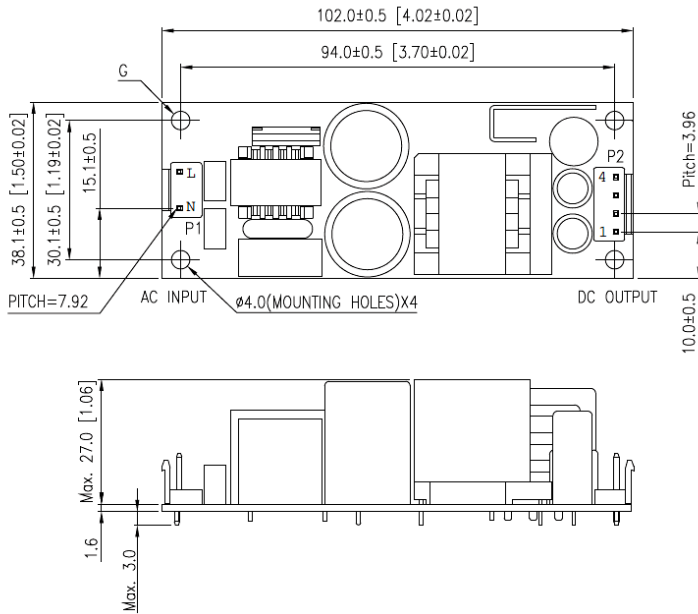


Pin Connections	
Pin	Function
1	-Vout
2	-Vout
3	+Vout
4	+Vout

Notes

1. All dimensions shown in millimetres (inches)
2. Input header JST B2P3-VH , mates with JST VHR-3N
3. Output header JST B4P-VH , mates with JST VHR-4N

Installation Advice

Safety

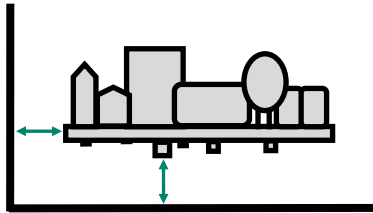

On installation customers must consider the required creepage and clearance distances between the PSU and the end-equipment enclosure. These distances vary depending on the installation class and safety standard requirements.


For **Class I** installations there should be 3-4mm between any part of the PSU and any earthed metal part of the enclosure. 3mm is acceptable for IT applications, 4mm required for medical applications. In Class I installations the PSU earth point must be connected to system safety ground.

For **Class II** installations distances may need to be increased if being installed into a surrounding metal enclosure.

Ensure consideration of components on the underside of the PCB or low lying spills when measuring clearance distances between the PSU and the end-equipment. Also top surface especially in tight enclosures such as 1U boxes. An insulation material can be used between PSU and metal if smaller gap required.

FiDUS recommends installing the PSU on 6mm stand offs typically, but check the distances.

EMC

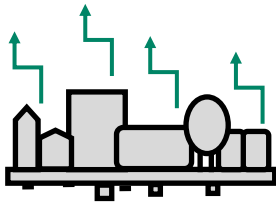


Conducted and radiated emissions compliance is a common application consideration. It is important to remember that even when using a properly filtered PSU, an application may still not achieve compliance if it is not designed to minimise emissions. That being said, there are a number of things that can be done to optimise EMC performance either as best practice, or if you are struggling for compliance:

- 1) Connect all marked EMI ground points to earth. Often these are combined with the safety earth point (in class I installations), but on some power supplies there may be additional earth tags or mounting points.
- 2) Minimise the length of input/output wiring where possible and try to maintain max distance of the conductors from the PSU, to prevent noise pick up. Avoid bundling input and output cables together. A common component to avoid placing wiring near is the PFC inductor in power factor corrected power supplies.
- 3) Apply additional filtering before the PSU input (ensure consideration of which frequencies there are issues with before selecting a filter).
- 4) When using an open frame PSU, mount the supply on a metal plate and connect EMI mounting points.
- 5) In multi circuit systems, decouple the circuits locally.
- 6) Ferrites added between the PSU and system input connector and/or the DC output cables can help in reducing radiated noise issues in systems. If seen, issues are commonly in the 30-150MHz area.

For more detailed assistance, if you still have any concerns with compliance, please get in contact with our Engineering department who are on hand to assist with any queries.

Thermal

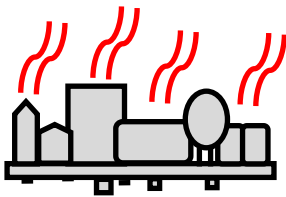


Thermal management is an important consideration when thinking about equipment service life. Electrolytic capacitors within the PSU wear with time and are typically the first end-of-life failure. Keeping the operation temperature of key components within the PSU, such as the electrolytic capacitors, as low as possible is paramount. As a general rule, for every 10°C drop in the operating temperature of the electrolytic capacitors you double their lifetime, and thus the lifetime of the power supply. When looking at thermal performance it is helpful to test under a worst-case set of conditions, to ensure component temperatures are in an acceptable range for the required service life. Then consider the impact of operational time, load and temperature profile to estimate a more realistic lifetime for your PSU.

Also, many FiDUS power supplies offer a *Peak Power* rating to provide for customers with pulsing loads. When using a peak power capability customers must consider:

- 1) Peak duration rating: the maximum length of time the peak can be drawn for
- 2) Duty cycle: the frequency with which the peak can be drawn. (e.g. 10% duty cycle, 1 second on:9 seconds off)
- 3) Average power value: datasheets will state the maximum average power acceptable with peak power PSUs. If any of these elements are exceeded the supply may overheat, with performance and lifetime suffering as a result.

Connectivity

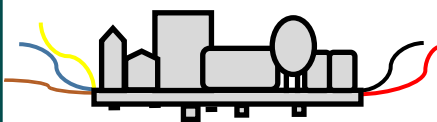

All FiDUS Power engineering samples requested will arrive with a free of charge loom kit for ease of testing.

The loom kit connects to the input/output terminals of the PSU and provides the customer with bare wire ends to connect with.

The loom kits can also prove advantageous for ease of installation in production. Please contact sales if you are interested in including the loom kit in your quotation. Alternatively the input/output connector and mating part details can be found in the attached table.

	Part Number	Mating Part Number
Input	JST B2P3-VH	JST VHR-3N
Output	JST B4P-VH	JST VHR-4N
Loom Kit	RHM75 LK	